


Handle Installation & Filter Replacement

For Models: HC5, HT8 and HE7

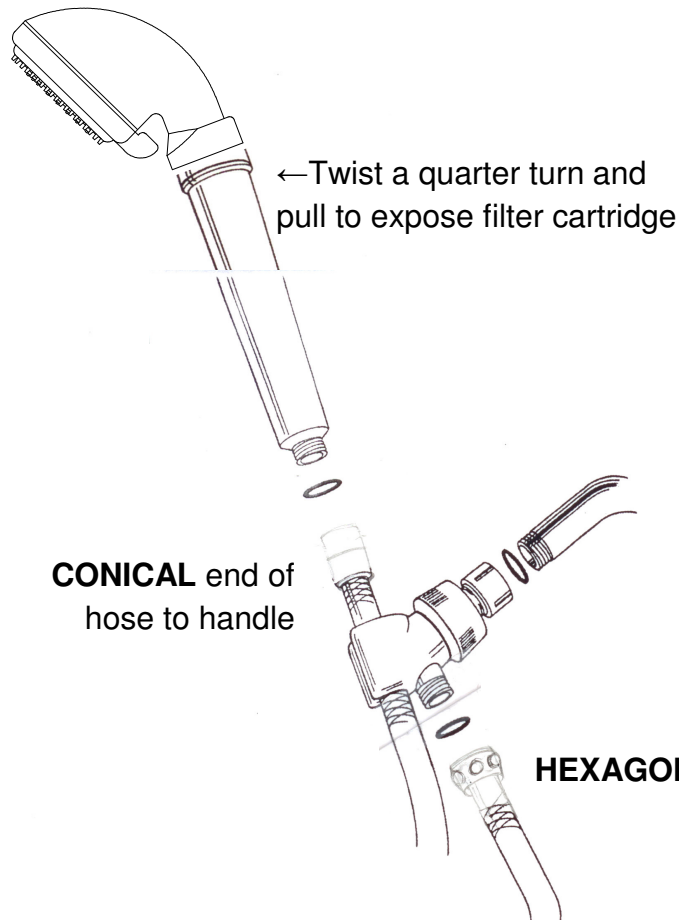

Installation

- Remove existing shower head
- Attach Bracket to Shower Arm
- Attach Hexagonal end of hose to bracket
- Attach Conical end of hose to handle

Use Replacement Filter Cartridge Model HHC

- To open housing: Twist counter clockwise a quarter of a turn and pull away from the spray nozzle.
- To remove filter cartridge: Twist and pull.

To extract a filter cartridge stuck inside the handle: Remove the conical end of the hose from the handle. Insert the flat eraser end of a pencil to push the cartridge up and out.



1791 Railroad St, Corona, CA 92880 U.S.

U.S. Toll Free: 1-800-327-9137 • (951) 735-1015 • www.SpriteShowers.com